


HW


NF - negative

NF-Chop Saw Blades HW - negative hook angle triple chip / flat

Product



Drawing

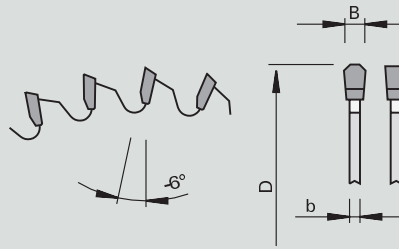

Machine



Application



Design

TR-F

3-0-1

2-0-6

Machine / Application

- clipping and miter saws
- for clipping and miter cuts in aluminum and plastic profiles

Design

- negative hook angle
- tooth configuration: triple chip / flat "TR-F"
- quality 3-0-1 from Ø 400 upwards
- cutting material: HW TCm10 from Ø 400 TC06

Advantages

- noise-reduction thanks to laser ornaments

Notes

Product features

Order information

| Ø D [mm] | B [mm] | b [mm] | Ø d [mm] | Z | Cutting quality* NL** | Hook angle [°] | | PU [pc.] | L | Order-No. |
|----------|--------|--------|----------|-----|-----------------------|----------------------------------|----|----------|---|-----------|
| 235 | 2,8 | 2,2 | 30 | 64 | ▲▲ | 2/7/42 | -6 | 1 | | 58115018 |
| 250 | 3,2 | 2,5 | 30 | 60 | ▲▲ | Combi3 | -6 | 1 | | 58808201 |
| 250 | 2,8 | 2,2 | 30 | 80 | ▲▲▲ | Combi3 | -6 | 1 | | 58808200 |
| 250 | 3,2 | 2,5 | 30 | 80 | ▲▲▲ | Combi3 | -6 | 1 | | 58808203 |
| 250 | 3,2 | 2,5 | 32 | 60 | ▲▲ | Combi3 | -6 | 1 | o | 58808202 |
| 250 | 3,2 | 2,5 | 32 | 80 | ▲▲▲ | Combi3 | -6 | 1 | o | 58808204 |
| 250 | 3,2 | 2,5 | 40 | 80 | ▲▲▲ | 4/12/64 + 2/9/55 + Combi3 | -6 | 1 | o | 58808205 |
| 254 | 3,2 | 2,5 | 30 | 80 | ▲▲▲ | Combi3 | -6 | 1 | o | 58808246 |
| 260 | 3,2 | 2,5 | 30 | 72 | ▲▲ | Combi3 | -6 | 1 | | 58808206 |
| 300 | 3,2 | 2,5 | 30 | 72 | ▲▲ | Combi3 | -6 | 1 | | 58808209 |
| 300 | 3,2 | 2,5 | 30 | 84 | ▲▲▲ | Combi3 | -6 | 1 | o | 58808244 |
| 300 | 2,8 | 2,2 | 30 | 96 | ▲▲▲ | Combi3 | -6 | 1 | | 58808213 |
| 300 | 3,2 | 2,5 | 30 | 96 | ▲▲▲ | Combi3 | -6 | 1 | | 58808214 |
| 300 | 3,2 | 2,5 | 32 | 96 | ▲▲▲ | 4/12/64 | -6 | 1 | | 58808215 |
| 300 | 3,3 | 2,5 | 40 | 96 | ▲▲▲ | 4/12/64 + 2/9/55 | -6 | 1 | | 58808216 |
| 305 | 3,2 | 2,5 | 30 | 96 | ▲▲▲ | Combi3 | -6 | 1 | | 58808245 |
| 305 | 3,2 | 2,5 | 30 | 60 | ▲▲ | Combi3 | -6 | 1 | | 58808241 |
| 330 | 3,2 | 2,5 | 30 | 96 | ▲▲▲ | Combi3 | -6 | 1 | | 58808217 |
| 330 | 3,2 | 2,5 | 32 | 96 | ▲▲▲ | Combi3 | -6 | 1 | o | 58808218 |
| 350 | 3,2 | 2,5 | 30 | 90 | ▲▲ | Combi3 | -6 | 1 | | 58808222 |
| 350 | 3,2 | 2,5 | 30 | 108 | ▲▲▲ | Combi3 | -6 | 1 | | 58808225 |
| 350 | 3,2 | 2,5 | 32 | 108 | ▲▲▲ | 4/12/64 | -6 | 1 | | 58808226 |
| 350 | 3,2 | 2,5 | 40 | 108 | ▲▲ | 4/12/64 + 2/9/55 | -6 | 1 | o | 58808227 |
| 380 | 3,8 | 3,2 | 32 | 110 | ▲▲▲ | 4/12/64 | -6 | 1 | | 58808243 |
| 400 | 3,8 | 3,2 | 30 | 96 | ▲▲ | Combi3 | -6 | 1 | | 58808232 |
| 420 | 4,0 | 3,2 | 30 | 96 | ▲▲ | Combi3 | -6 | 1 | | 58808234 |
| 420 | 3,8 | 3,2 | 40 | 100 | ▲▲▲ | 4/12/64 + 2/9/55 | -6 | 1 | | 58808236 |
| 450 | 3,8 | 3,2 | 30 | 96 | ▲▲ | 4/12/64 + 2/12/80 + Combi3 | -6 | 1 | | 58808235 |
| 500 | 4,0 | 3,4 | 30 | 120 | ▲▲▲ | 4/12/64 + 2/10/60 | -6 | 1 | | 58808239 |

* cutting quality: ▲ very rough cut ▲▲ rough cut, ▲▲▲ fine cut ▲▲▲▲ very fine cut

** pin holes: Combi1 matches 2/10/60 and 2/7/42 Combi3 matches 2/10/60 and 2/9/46 and 2/9,5/46,5 and 2/7/42

For suitable reducing rings see chapter CONSTRUCTION/Saws/Reducing Rings