





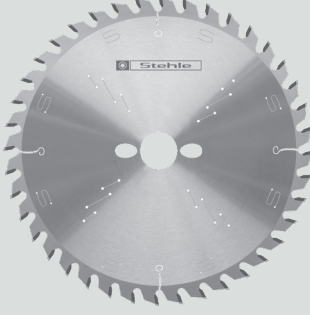

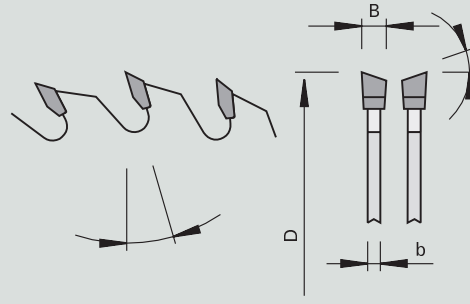

HW

HKS - solid

Portable Saw Blades HW - alternate top bevel

Product	Drawing	Machine	Application	Design
		 	  	WS 1-0-1  HW TC10

Machine / Application	Design	Advantages	Notes
<ul style="list-style-type: none"> portable saws clipping and miter saws for ripping and cross cuts in solid woods 	<ul style="list-style-type: none"> tooth configuration: alternate top bevel "WS" cutting material: HW TC10 		<ul style="list-style-type: none"> for larger dimensions see ZOW

Product features								Order information		
Ø D [mm]	B [mm]	b [mm]	Ø d [mm]	Z	Cutting quality* NL**	Hook angle [°]	PU [pc.]	L	Order-No.	
120	1,8	1,3	20	24	▲▲		1		50104061	
125	2,4	1,6	20	20	▲▲▲	2/5,5/30	1		50110011	
130	2,4	1,6	20	20	▲▲▲	2/6/32,5	1		50110017	
140	2,4	1,6	20	20	▲▲▲	2/6/32,5	1		50110028	
140	2,4	1,6	20	12	▲	2/6/32,5	1		50110242	
150	2,6	1,6	20	24	▲▲▲	2/6/32,5	1		50110039	
150	2,6	1,6	20	12	▲	2/6/32,5	1		50110243	
150	2,6	1,6	30	24	▲▲▲	2/7/42	1		50110042	
152	2,6	1,6	20	24	▲▲		1		58114125	
160	2,6	1,6	16	24	▲▲▲	2/6/32,5	1		50110051	
160	2,2	1,6	20	24	▲▲▲	2/6/32,5	1		50110054	
160	2,2	1,6	20	12	▲	2/6/32,5	1		50110244	
160	2,6	1,6	30	24	▲▲▲	2/7/42	1		50110057	
165	2,6	1,6	20	24	▲	2/6/32,5	1		50110060	
165	2,6	1,6	30	24	▲	2/7/42	1		50110130	
170	2,6	1,6	30	24	▲▲▲	2/7/42	1		50110069	
180	2,6	1,6	16	24	▲▲▲	2/6/32,5	1		50110081	
180	2,6	1,6	20	24	▲▲▲	2/6/32,5	1		50110075	
180	2,6	1,6	20	14	▲	2/6/32,5	1		50110247	
180	2,6	1,6	30	24	▲▲▲	2/7/42	1		50110078	
180	2,6	1,6	30	14	▲	2/7/42	1		50110248	
184	2,6	1,6	20	24	▲▲▲	2/6/32,5	1	o	50110082	
184	2,6	1,6	16	40	▲▲▲▲	2/6/32,5	1	o	50110282	
190	2,6	1,6	16	24	▲▲▲	2/6/32,5	1		50110153	
190	2,6	1,6	20	16	▲	2/6/32,5	1	o	50110250	
190	2,6	1,6	20	24	▲▲▲	2/6/32,5	1		50110154	
190	2,6	1,6	30	24	▲▲▲	2/7/42	1		50110155	
190	2,6	1,6	30	16	▲	2/7/42	1		50110251	
190	2,6	1,6	30	24	▲▲▲		1		58114105	
200	2,8	1,8	30	30	▲▲▲▲	2/7/42	1		50110095	
203	2,7	1,8	30	24	▲▲▲		1		58114132	
200	2,8	1,8	30	18	▲	2/7/42	1		50110252	
205	2,6	1,8	18	30	▲▲▲▲		1		50110286	
210	2,8	1,8	30	30	▲▲▲▲	2/7/42	1		50110104	
210	2,8	1,8	30	18	▲	2/7/42	1		50110253	
216	2,8	1,8	30	30	▲▲▲▲	2/7/42	1		50110107	
220	2,8	1,8	30	36	▲▲▲▲	2/7/42	1		50110110	
220	2,8	1,8	30	24	▲▲▲	2/7/42	1		50110164	
225	2,8	1,8	30	24	▲▲▲	2/7/42	1		50110165	

* cutting quality: ▲ very rough cut ▲▲ rough cut, ▲▲▲ fine cut ▲▲▲▲ very fine cut

** pin holes: Combi1 matches 2/10/60 and 2/7/42 Combi3 matches 2/10/60 and 2/9/46 and 2/9,5/46,5 and 2/7/42

For suitable reducing rings see chapter CONSTRUCTION/Saws/Reducing Rings

Product features							Order information				
Ø D [mm]	B [mm]	b [mm]	Ø d [mm]	Z	Cutting quality*	NL**	Hook angle [°]		PU [pc.]	L	Order-No.
225	2,8	1,8	30	34	▲▲▲	2/7/42	15		1		50110228
230	2,8	1,8	30	36	▲▲▲	2/7/42	15		1		50110113
230	2,8	1,8	30	24	▲▲	2/7/42	15		1		50110168
230	2,8	1,8	30	18	▲	2/7/42	20		1		50110255
240	3,0	2,0	30	64	▲▲▲	2/7/42	20		1	o	50687903

* cutting quality: ▲ very rough cut ▲▲ rough cut, ▲▲▲ fine cut ▲▲▲▲ very fine cut

** pin holes: **Combi1** matches 2/10/60 and 2/7/42 **Combi3** matches 2/10/60 and 2/9/46 and 2/9,5/46,5 and 2/7/42
For suitable **reducing rings** see chapter CONSTRUCTION/Saws/Reducing Rings