

HW


ZW

Trimming Saw Blades HW - alternate bevel tooth

Product



Drawing

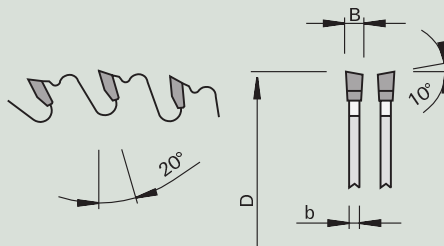

Machine



Application



Design

WS

2-0-6

HW
TC10

Machine / Application

- table saws
- special machines
- for sizing cuts in solid woods
- especially for knotty woods

Design

- tooth configuration: alternate top bevel "WS"
- cutting material: HW TC10

Advantages

- no chipped edges from knots thanks to chip limiter

Notes

- larger bore (max. Ø 50 mm) available for a surcharge

Product features

Order information

Ø D [mm]	B [mm]	b [mm]	Ø d [mm]	Z	Cutting quality*	NL**	Hook angle [°]	PU [pc.]	L	Order-No.
250	3,2	2,2	30	24	▲	Combi3	20	1		58102001
300	3,2	2,2	30	28	▲	Combi3	20	1		58102002
315	3,2	2,2	30	28	▲	Combi3	20	1		58102003
350	3,5	2,5	30	32	▲	Combi3	20	1		58101004
400	3,5	2,5	30	36	▲	Combi3	20	1		58101005
450	4,2	2,8	30	20	▲	Combi3	25	1		58101020
450	3,8	2,8	30	40	▲	Combi3	20	1		58101006
500	3,8	2,8	30	44	▲	Combi3	20	1		58102007
600	4,2	3,2	30	54	▲	Combi3	20	1		58101018
700	4,2	3,2	30	60	▲	Combi3	20	1		58101019

* cutting quality: ▲ very rough cut ▲▲ rough cut, ▲▲▲ fine cut ▲▲▲▲ very fine cut

** pin holes: Combi1 matches 2/10/60 and 2/7/42 Combi3 matches 2/10/60 and 2/9/46 and 2/9,5/46,5 and 2/7/42

For suitable reducing rings see chapter Saws /Accessories/Reducing Rings